

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
I	10APR2014	DJK/KAM	PRN: 2014-0404

NOTES:

A. CABLE  
 UL 2464 [24AWG(7/0.20 TC)\*5C]\*1C,  
 UNSHIELDED, -30 TO 105° C  
 BLACK PVC JACKET


B. WIRE DESIGNATION TABLE

WIRE COLOR	P1
BLACK	1
RED	2
ORANGE	4
BROWN	5
YELLOW	6
nc	3


C. MATERIALS COMPLY WITH RoHS DIRECTIVE.

D. ALL TERMINATIONS TO BE IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.

E. COIL AND BAG FINISHED ASSEMBLY IN SEALED POLYPROPYLENE BAG.

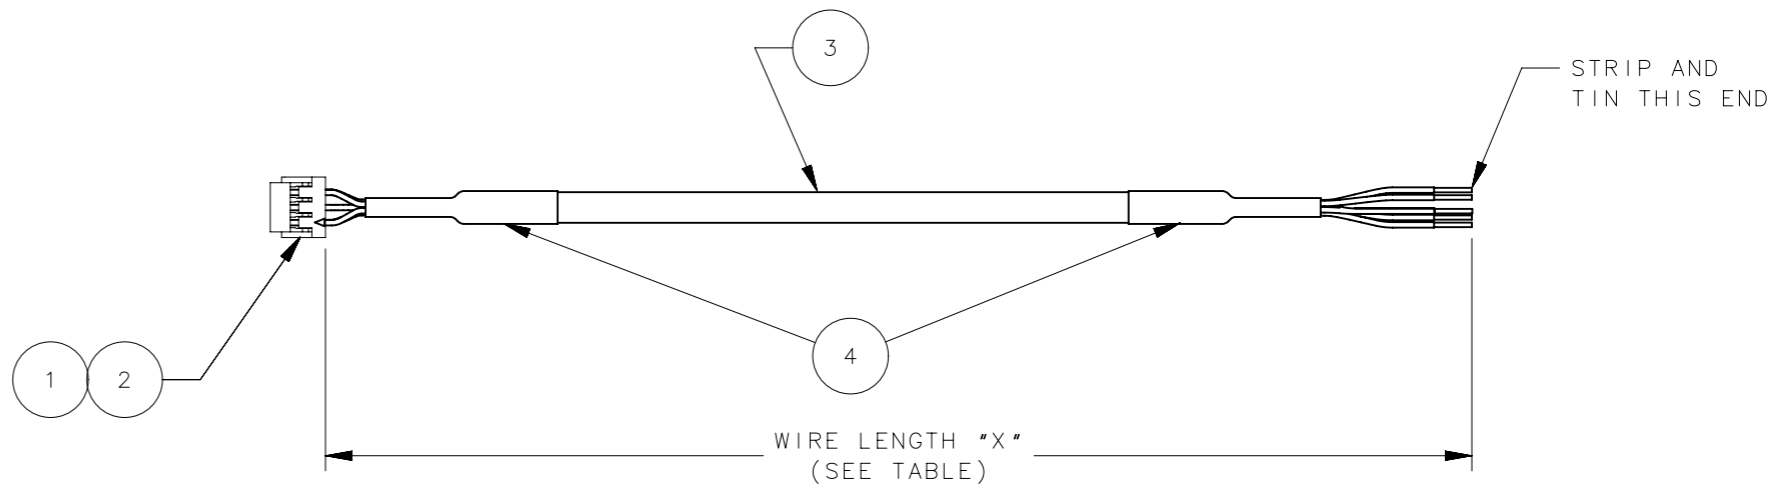

WIRE LENGTH TABLE	
"X" LENGTH (mm)	
1	1000
2	2000
3	3000
4	4000
5	5000
15	15000

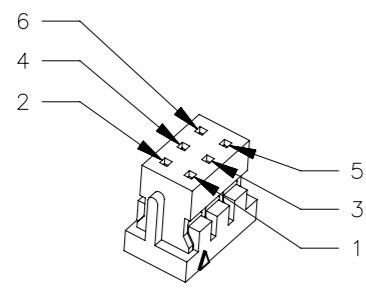

P1 PIN DESIGNATION  
(2:1 SCALED VIEW)

NO.	COMPONENT	QTY	PART NO.	SPECIFICATIONS
4	HEAT SHRINKABLE TUBING	2	-	BLACK
3	CABLE	-	-	SEE NOTE A
2	CONTACT (P1)	5	HIROSE: DF11-2428SC OR DF11-2428SCF (OR APPROVED EQUIVALENT)	-
1	CONNECTOR (P1)	1	HIROSE: DF11-6DS-2C (OR APPROVED EQUIVALENT)	-
-	ASSEMBLY	1	EA-W01-X00	-

THIRD ANGLE PROJECTION		 CONNECT • CREATE • INNOVATE		
MILLIMETERS [IN]				
TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION		
SURFACE AREA		<b>WIRE HARNESS</b>		
VOLUME				
PROPRIETARY ITEM				
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.				
PER ASME Y14.5M-1994		SIZE	SYSTEM	DWG NO.
		A3	NX	J-EA-W01
		DRAWN BY	DATE	SCALE
		ACH/MJS	09JAN2009	1:1
				SHEET 1 OF 1