


## GENERAL PERFORMANCE GUIDELINES

The information shown on this page was determined under one set of test conditions. Since conditions vary with each application, it is supplied as a general guide only. No safety factor has been applied. We recommend testing the product under actual application conditions to determine its suitability for intended use.

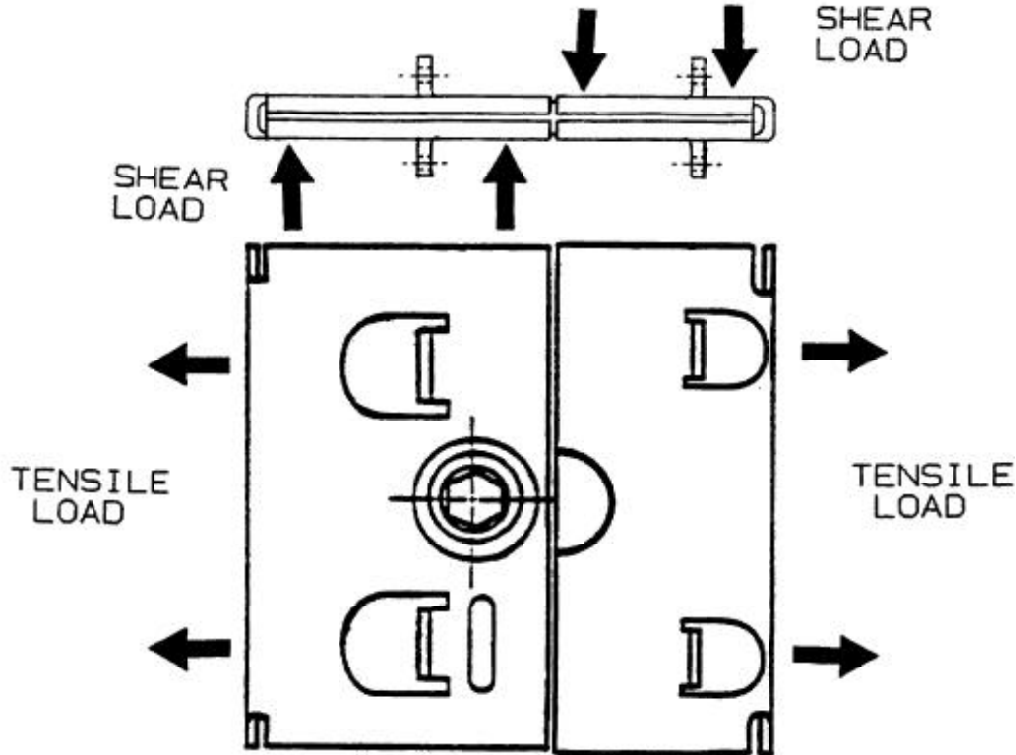

ITEM	PART NUMBERS	ULTIMATE TENSILE LOAD	ULTIMATE SHEAR LOAD
NO. 1 ROTO-LOCK	SHALLOW TAB 2-67-0259-02 2-67-0257-02	1400 LBS. 6200 N.	2000 LBS. 8900 N.
	DEEP TAB 2-67-0169-02 2-67-0160-02		
	NON-TAB 2-67-0055-02 2-67-0002-02		

DRAWING NUMBER TD-ROTO-J  
SCALE —  
DATE 12-90  
DRAWN GJC  
CHKD

No. 1 ROTO-LOCK

**southco**

DRAWING NUMBER TD-ROTO-J

PROPRIETARY ITEM. EXCEPT FOR USE EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL, AND ALL RIGHTS, PATENT AND OTHERWISE ARE RESERVED BY SIMMONS FASTENER COMPANY