


REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
A	11APR2012	MJS/JT	INITIAL RELEASE

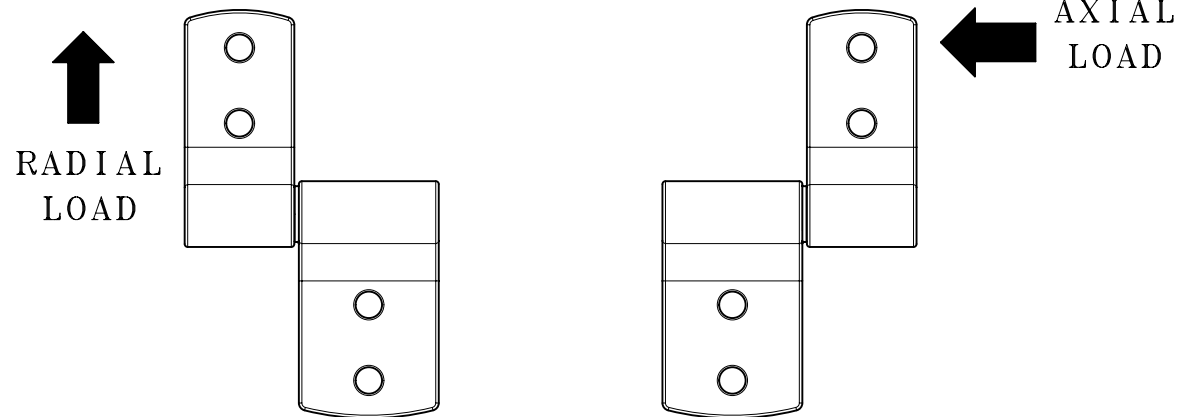

PART NUMBER		MAXIMUM STATIC RADIAL LOAD N (lbf) ①	MAXIMUM STATIC AXIAL LOAD N (lbf) ①	STATIC TORQUE ±20% N-m (in-lbf)	CYCLE LIFE 1.34 kg (2.9438 lbs) ②
TYPE A	TYPE B				
ST-8A-40SA-[XX]	ST-8A-40SB-[XX]	300 N (67 lbf)	200 N (45 lbf)	0.45 (4.0)	20,000
ST-8A-60SA-[XX]	ST-8A-60SB-[XX]			0.68 (6.0)	
ST-8A-80SA-[XX]	ST-8A-80SB-[XX]			0.90 (8.0)	
ST-8A-40FA-[XX]	ST-8A-40FB-[XX]			0.45 (4.0)	
ST-8A-60FA-[XX]	ST-8A-60FB-[XX]			0.68 (6.0)	
ST-8A-80FA-[XX]	ST-8A-80FB-[XX]			0.90 (8.0)	
ST-8A-100FA-[XX]	ST-8A-100FB-[XX]			1.13 (10.0)	
ST-8A-40RA-[XX]	ST-8A-40RB-[XX]			0.45 (4.0)	
ST-8A-60RA-[XX]	ST-8A-60RB-[XX]			0.68 (6.0)	
ST-8A-80RA-[XX]	ST-8A-80RB-[XX]			0.90 (8.0)	
ST-8A-100RA-[XX]	ST-8A-100RB-[XX]			1.13 (10.0)	

NOTES:

- ① AXIAL AND RADIAL LOADS APPLIED ONE TIME TO A SINGLE HINGE WITHOUT DEGRADATION OF PERFORMANCE.
- ② CLOSED POSITION TO OPEN POSITION AT 180° PLUS RETURN TO INITIAL CLOSED POSITION; AT AMBIENT TEMPERATURE.

THIRD ANGLE PROJECTION

MILLIMETERS [IN]

TOLERANCES UNLESS OTHERWISE NOTED

ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.

PROPRIETARY ITEM
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.

PER ASME Y14.5M-1994

southco[®]
CONNECT • CREATE • INNOVATE

DESCRIPTION
Hinge & Controlled Motion Device
ST-8A HINGE

SIZE A4	SYSTEM NX	DWG NO. TD-ST-8A-J
DRAWN BY MJS/JT	DATE 11APR2012	SCALE 1:1 SHEET 1 OF 1