OSCIONED HINEDS IN CONSTRUCTION AND ALL RIGHT PASSAGE AND AN REVENUE OF BOUTHCO, INC.

CONTROL DISCLOSED HISTORY OF STATEMENT OF ST

SCAL

CHAR

4 31148


SAUGE.

4

2

## General Performance Guidelines

The information shown on this page was determined under one set of test conditions and is supplied as a general guide only, as conditions vary with each application. Strength data given is for failure of the product or for sufficient deformation to make the product inoperable. No safety factor has It is recommended that the user test the product been applied. for his particular application.

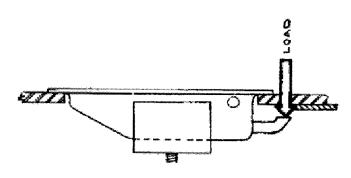

Nº 64 PADOLE LATER - 100 SERIES P/n 64-10-101-70

FLATERIARY VIELDED WHEN A LOAD OF 50 APPLIED IN THE DIRECTION OF THE ARROW.