


General Performance Guidelines

The information shown on this page was determined under one set of test conditions and is supplied as a general guide only, as conditions vary with each application. Strength data given is for failure of the product or for sufficient deformation to make the product inoperable. No safety factor has been applied. It is recommended that the user test the product for his particular application.

N° 44 ADJUSTABLE GRIP LATCH

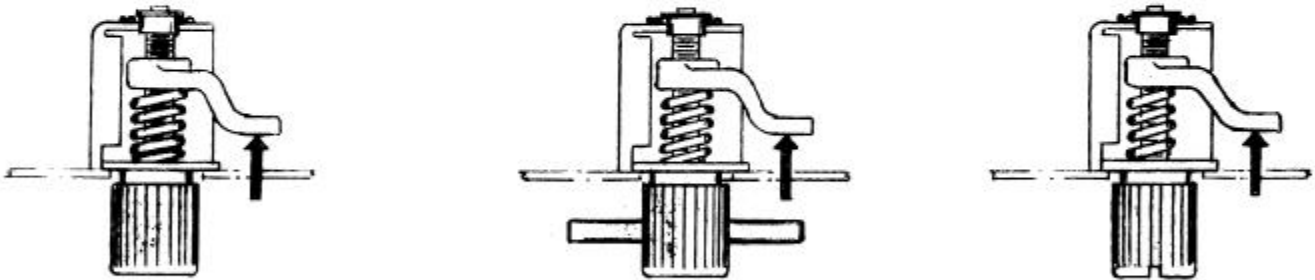

FASTENERS YIELDED WHEN A LOAD OF 100 LBS. WAS APPLIED IN THE DIRECTION OF THE ARROW. HOWEVER FASTENER COULD NOT BE UNLATCHED WITH THE LOADS INDICATED IN THE FOLLOWING TABLE.

HEAD TYPE	APPLIED LOAD AT WHICH FASTENER COULD NOT BE UNLATCHED
KNURLED HEAD (HAND OPERATED)	25 LBS.
"T"-BAR HEAD	75 LBS.
KNURLED HEAD W/ SCREW DRIVER SLOT	75 LBS.

N° 44 FASTENER

southco®

DATE	10-19-72	ESK
DESIGN		
CHKD		
SCALE		
DRAWING NUMBER	TD-44-1	
R.S.		
A		
B		
C		
D		
DATE		
APP		

DRAWING NUMBER
TD-44-1