
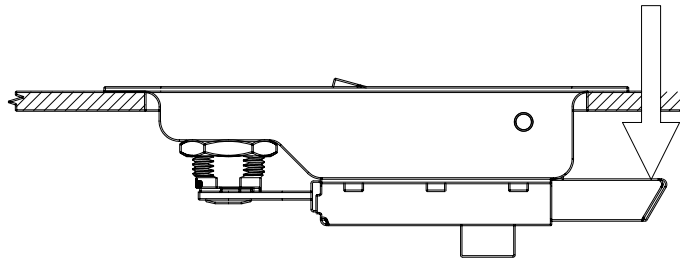


REV	DATE	DRAWN/CHKD	DESCRIPTION	PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.	No. 64 PADDLE LATCH	DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
						21FEB2005	MJS	MF	.5:1	TD-64-50-J
										
A4 PAPER SIZE										

SOUTHCO PERFORMANCE GUIDELINES
 THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.



PART No. 64-50-4XX-XX

MAXIMUM RECOMMENDED WORKING LOAD	560 N (125 LBS)
AVERAGE ULTIMATE LOAD	2,317 N (520 LBS)

- ① MAXIMUM WORKING LOAD - is the maximum recommended force at which the product continues to function properly.
- ② AVERAGE ULTIMATE LOAD - is the load that causes failure or excessive deformation which renders the product inoperable.
- ③ Overloading the fastener beyond these conditions is not recommended.