



**southco®**

PROPRIETARY ITEM - EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY SOUTHCO, INC.

CR ROD SYSTEM

DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
02FEB2009	FHS	XXX	DNS	TD-CR-02-J

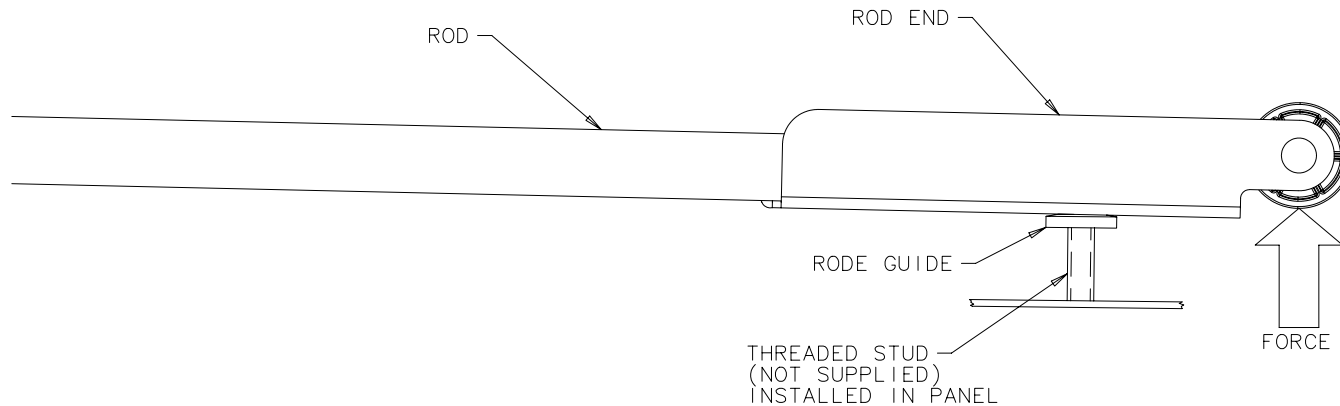
REV	DATE	DRAWN/CHKD	DESCRIPTION
A	13FEB2009	FHS/SP	RELEASED



  
 THIRD ANGLE PROJECTION | A4 PAPER SIZE

SOUTHCO PERFORMANCE GUIDELINES

THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

MAXIMUM STATIC LOAD	AVERAGE ULTIMATE STRENGTH	AVERAGE DEFLECTION AT ULTIMATE STRENGTH
500 N	3650 N	11.7mm



REF: trCR-03